

VANGUARD SECURITY ENGINEERING CORP.




DOOR HOLDER - Floor DH504 SERIES



115

DH504: 118L*93W*115H mm

ORDERING INFORMATION



EXAMPLE:

- DH504: Floor mounted, w/adjustable armature plate, w/release switch
- DH504S: Floor mounted, w/adjustable armature plate, w/release switch, monitored
- DH504F: Floor mounted, w/fixed armature plate, w/release switch

▼ SPECIFICATION

- Holding Force: about 100LBS
- Built-in voltage spike suppressor
- Sensor : optional
- Voltage: 12 / 24VDC (Selectable)
- Current Draw: 100mA / 12VDC,


50mA / 24VDC

▼ FEATURES

- Suitable for fire escape doors in large-scale buildings.
- It releases the armature plate to allow the door closer to close the door when a fire alarm or emergency is detected, to keep smoke in a limited area.
- With Release Switch: to release the door for other purposes (e.g. function test)
- Adjustable, fixed, extended, or morticed armature plate

ARMATURE PLATEINSTALLATION

 Adjustable Armature Plate (default): applicable for environments with angle differences between the door and the wall

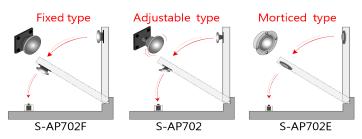

APPLICATION

 Floor mount: applicable for installation environment with long distance between the door and the wall.

