

## Model Number:

Our HL22 Push-Pull Trim can use with Schlage L Series Heavy Duty Mortise Locks, customers may just order HL22 Push-Pull Trim Only to use with Schlage mortise locks or to retrofit its existing installations. For other brand mortise locks such as Arrow, Best, Falcon, Sargent, Yale are also available, but need to consult our factory if customer has his requirement.

The model numbers of HL22 Push-Pull Trim with our M Series Heavy Duty Mortise Locks are listed below:

ANSI No.	THASE Model Number	Function	Function Description
F01	M1001 - HL22	Passage Latch	Detail see page 12
F04	M3004 - HL22	Office or Entry Lock	Detail see page 9
F05	M2005 - HL22	Classroom Lock	Detail see page 10
F09	M2009 - HL22	Apartment Entrance Lock, Public Toilet Lock	Detail see page 10
F11	M3411 - HL22	Dormitory or Exit Lock	Detail see page 8
F13	M2413 - HL22	Dormitory or Exit Lock	Detail see page 11
F14	M2414 - HL22	Store Door Lock	Detail see page 11
F19	M2419 - HL22	Privacy Bedroom, Bath Lock,	Detail see page 12
F20	M3420 - HL22	Apartment Corridor Door Lock	Detail see page 8
F22	M1022 - HL22	Privacy Bedroom, Bath Lock,	Detail see page 12
F30	M2030 - HL22	Asylum or Institution Lock	Detail see page 10

For other Classroom Security locks use, see page 7, 9 and 11.


## Handle Handing:

### Cylinder Operation:

Handle on cylinder side must be mounted in down or horizontal position, shown as below.

### Thumbturn operation:

If a standard thumbturn (Type No. 132) is provided, the inside handle must be mounted in horizontal position. If a special thumbturn (Type No. 133) is provided, the inside handle can be mounted in down position. Specify the thumbturn type when ordering.

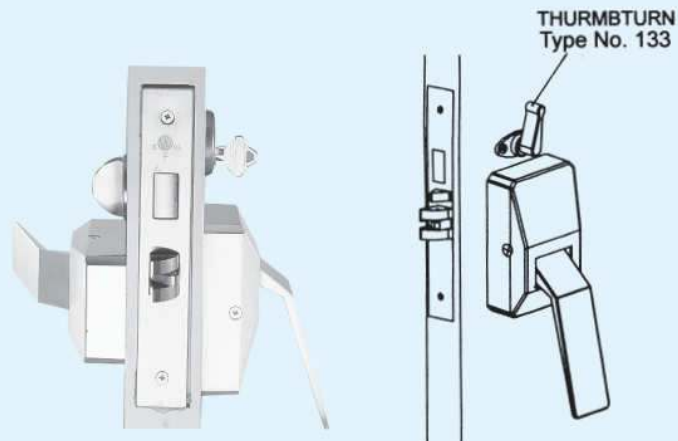

This Push-Pull Trim with heavy-duty mortise lock is model number M2413-HL22 (ANSI function no. 13) Dormitory or Exit Lock shown, which uses a standard thumbturn Type No. 132 and along with an inside wider handle in horizontal position.